

FIG. 1

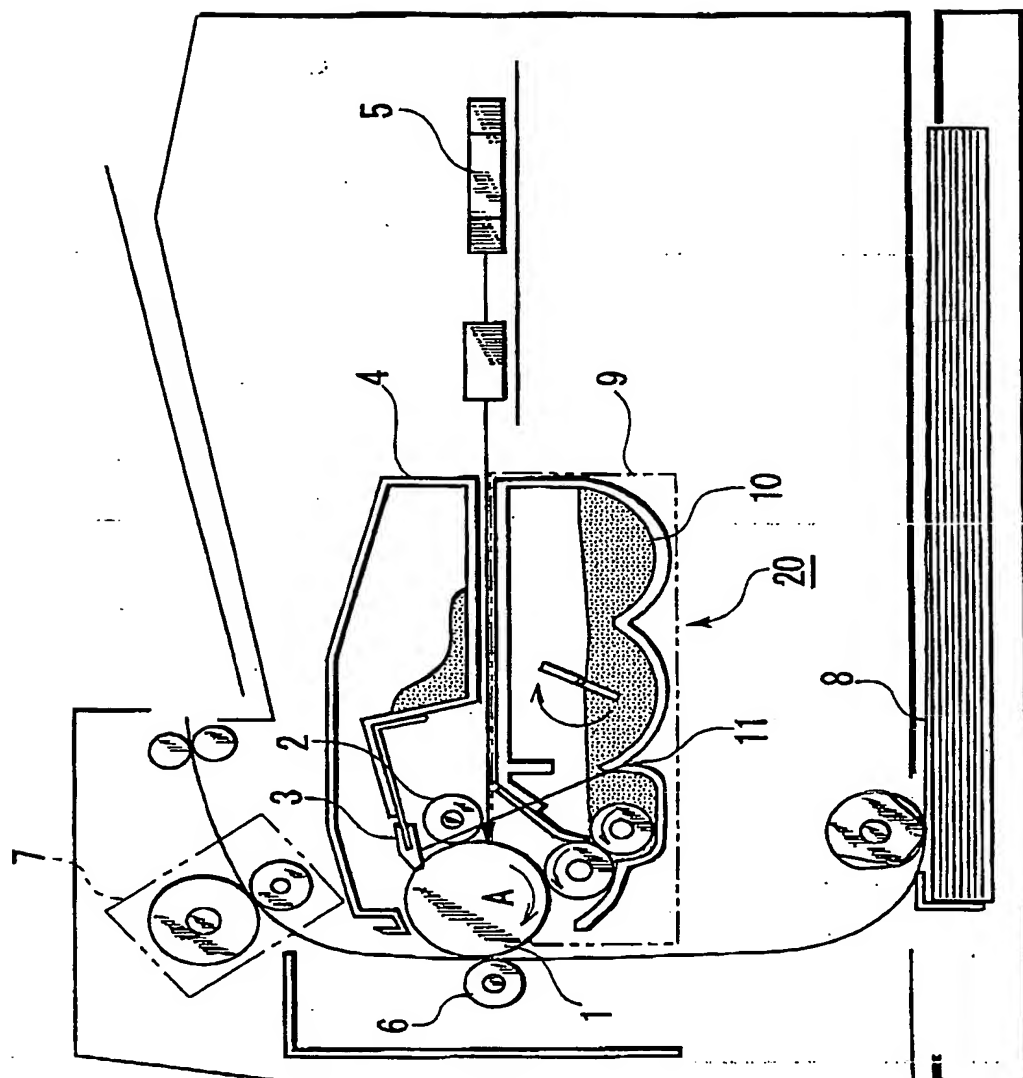


FIG. 2

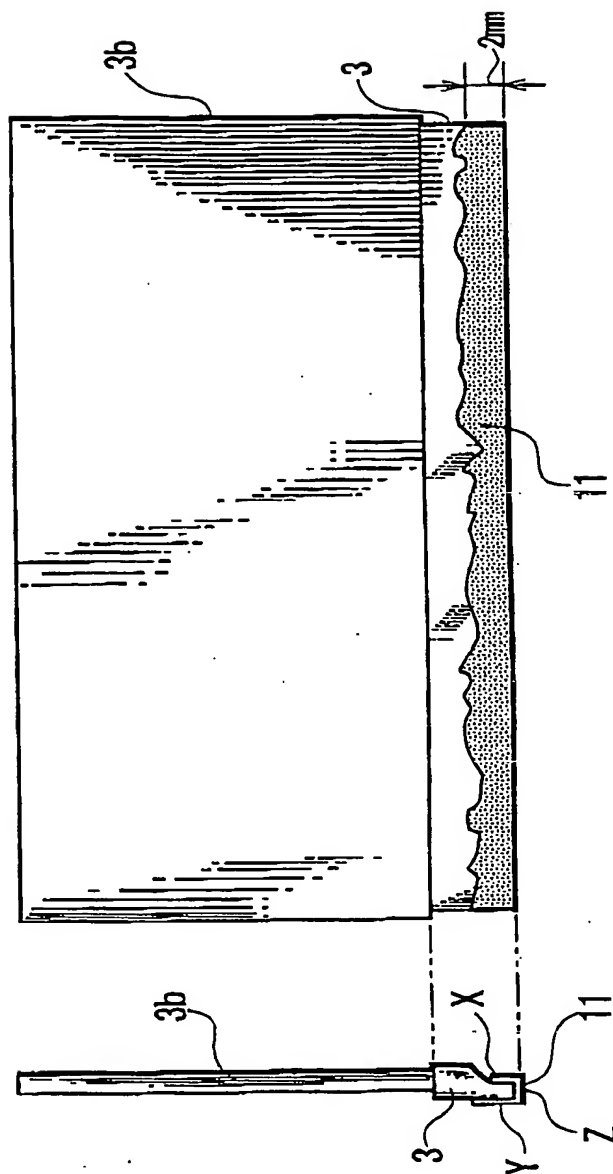


FIG. 3

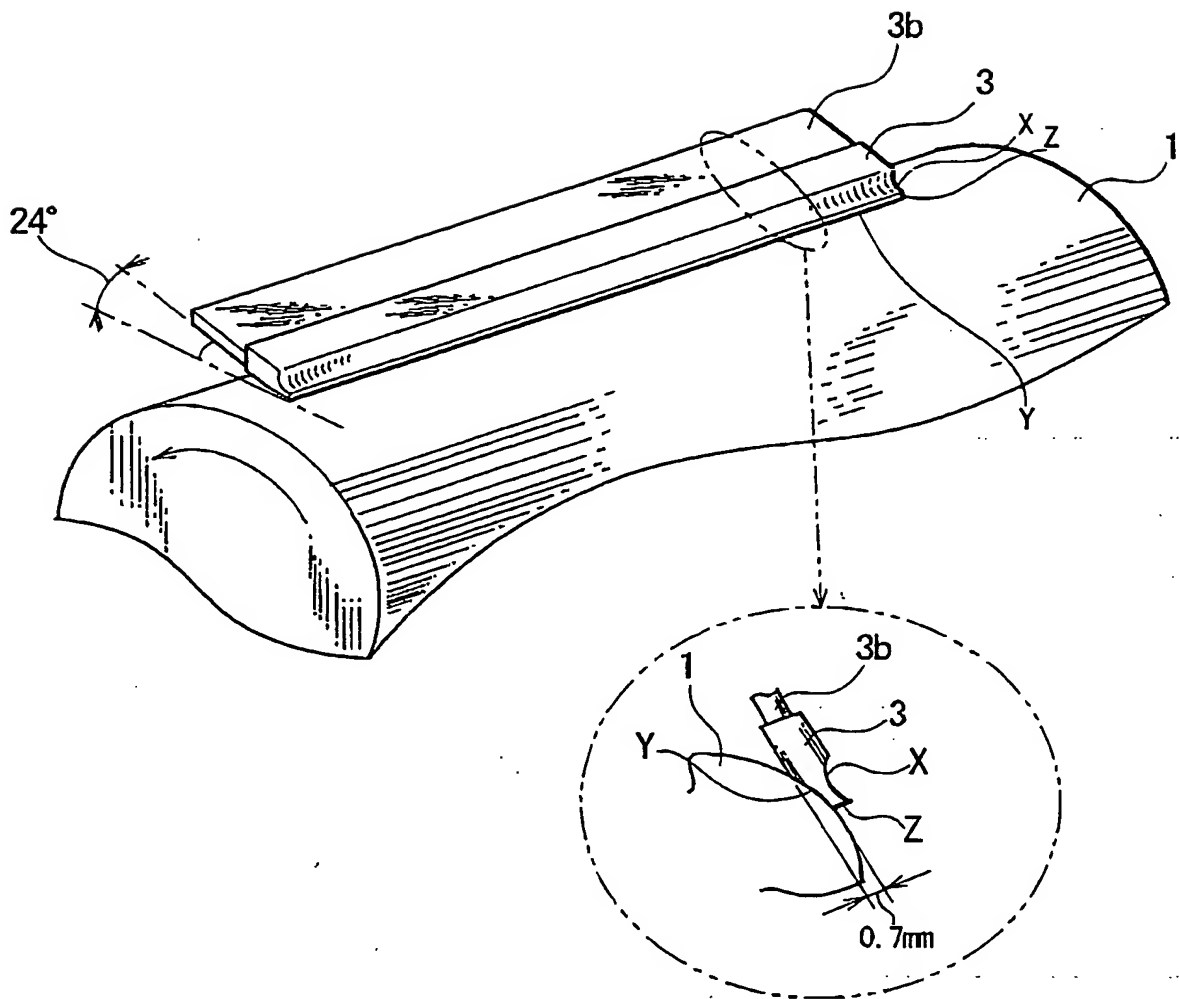


FIG. 4

CASE WHERE REDUCTION-PROCESSED TYPE TIN OXIDE HAVING
RESISTANCE THAT IS NOT MORE THAN $10^5 \Omega \text{ cm}$

TOSPEARL (wt%)	TIN OXIDE (wt%)	LUBRICANT ADHESIVENESS	BLADE DETACHMENT
100	0	×	○
90	10	×	○
80	20	◎	○
70	30	◎	○
60	40	◎	○
50	50	◎	○
40	60	○	○
30	70	○	○
20	80	○	○
10	90	○	×
0	100	○	×

FIG. 5

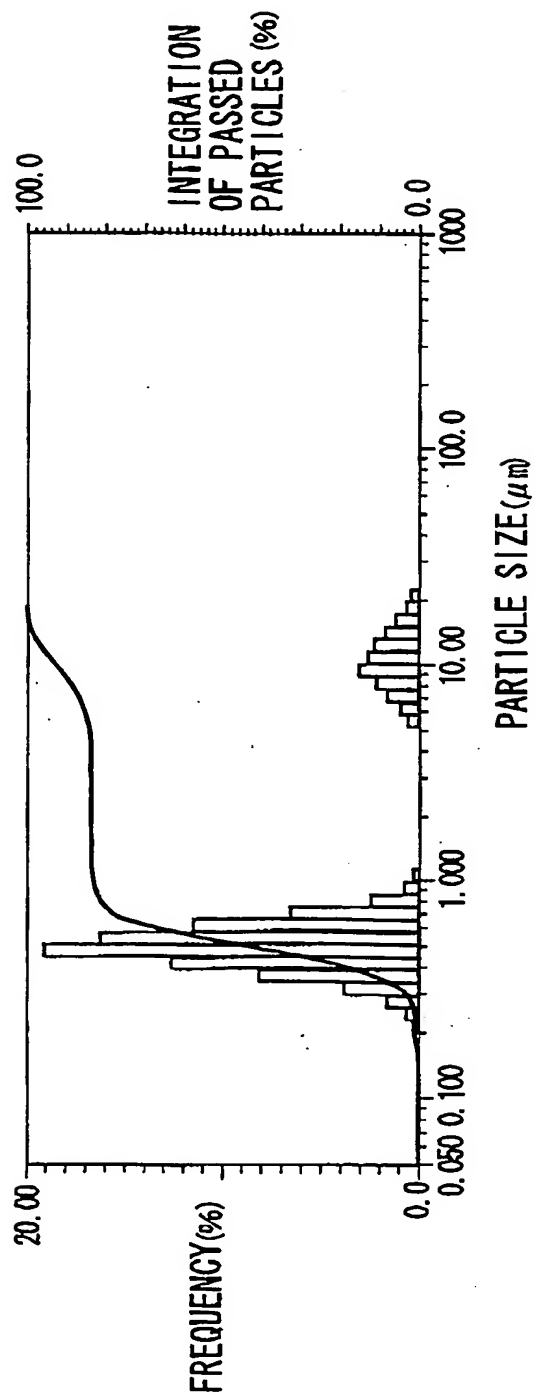


FIG. 6

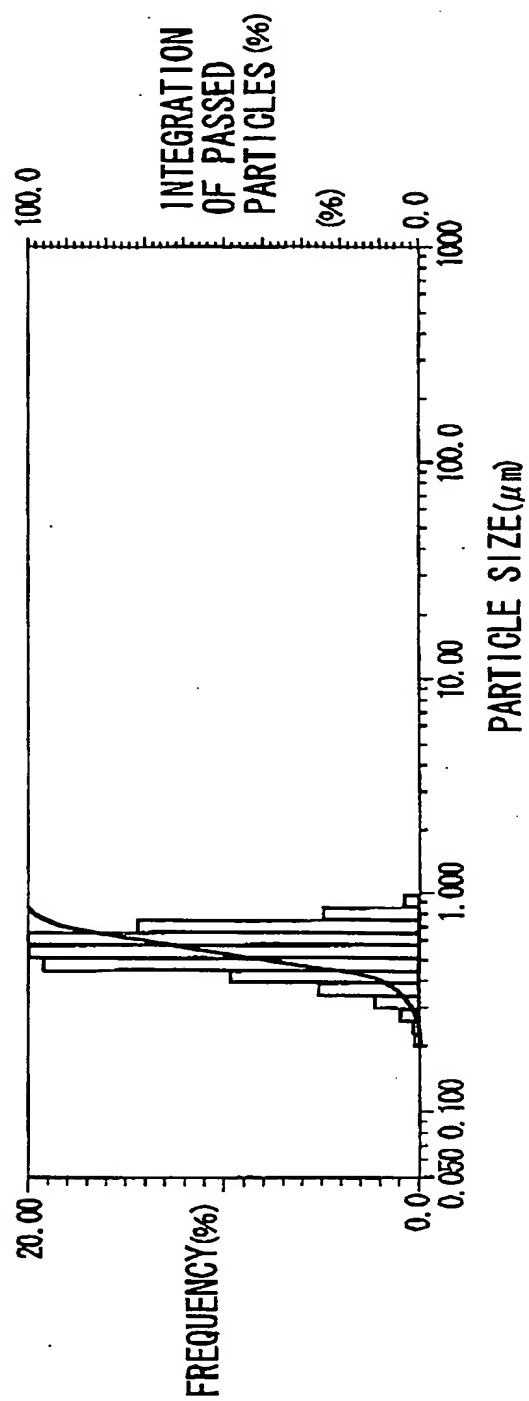


FIG. 7

CASE WHERE REDUCTION-PROCESSED TYPE TIN OXIDE HAVING
RESISTANCE THAT IS NOT MORE THAN $10^6 \Omega \text{cm}$

TOSPEARL (wt%)	TIN OXIDE (wt%)	LUBRICANT ADHESIVENESS	BLADE DETACHMENT
100	0	×	○
90	10	×	○
80	20	×	○
70	30	×	○
60	40	×	○
50	50	×	○
40	60	△	○
30	70	△	○
20	80	△	○
10	90	△	×
0	100	△	×